





## WINDOWWALL™

Curvature:	None, flat display tiles. Can be configured in convex and concave curved installations
Bezel Width	.14 in (3.66 mm)
Vanishing Point* with trim attached:	190 degrees
Service Accessibility:	Front and rear
Air Flow Clearance Requirement:	8" at the top of the wall installation
Ambient Lighting Recommendation:	The display will perform best with indirect lighting
Humidity Recommendation:	85% humidity. Bathroom installations not recommend
Options Available:	Custom architectural framing in a variety of styles and finishes
Mounting System:	TileAlign™ included with service mode braces, cable guides, and spacers

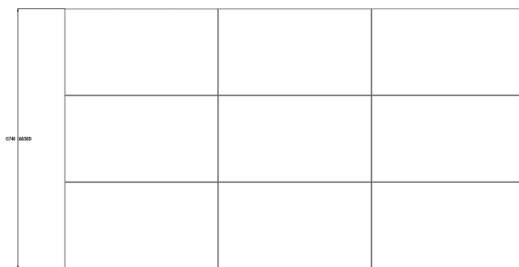

\*The viewing angle at which the back of the display is visible

For more information visit [www.Runco.com](http://www.Runco.com) or call 800-237-8626 or +1-503-748-1100.

Design parameters and drawings are subject to change without notice. ©2010 Runco, all rights reserved.